



TRIANGO 60-1 C



TECHNICAL DATA

FITTED WITH	1 × LED module
LUMINOUS POWER	60 000 lux / 1,0 m *
COLOR TEMPERATURE	4 700 K *
LIGHTING FIELD 1,0 m	ø 18 cm*
COLOR RENDERING INDEX	CRI > 93
OPERATION EQUIPMENT	Electronic converter
VOLTAGE	100-240 V; 50/60 Hz
CORD LENGTH	Direct power supply
LUMINAIRE BODY	Polyamide (PA)
WEIGHT (NET)	13 kg
POWER CONSUMPTION	< 30 W
USAGE	Touch panel on cardanic system
TECHNOLOGY	Single-pole secondary
BALANCE OF ARTICULATION JOINTS	Spring (weight compensation)
CLASS OF PROTECTION	I
PROTECTION RATING	IP 43 (illumination head)
STANDARDS MET	EN 60601-1, EN 60601-2-41
SPECIAL FEATURES	Continuously dimmable, sterilizable handle, maintenance-free
MOUNTING	Ceiling mount, ceiling tube could be cut to length 25-120 cm
ACCESSORIES	Sterilizable handle, disposable cover for handle, intermediate ceiling adapter
ORDER NUMBER	D16.250.000-00813741


TREATMENT LIGHT



LIGHT DISTRIBUTION



TECHNICAL DRAWING

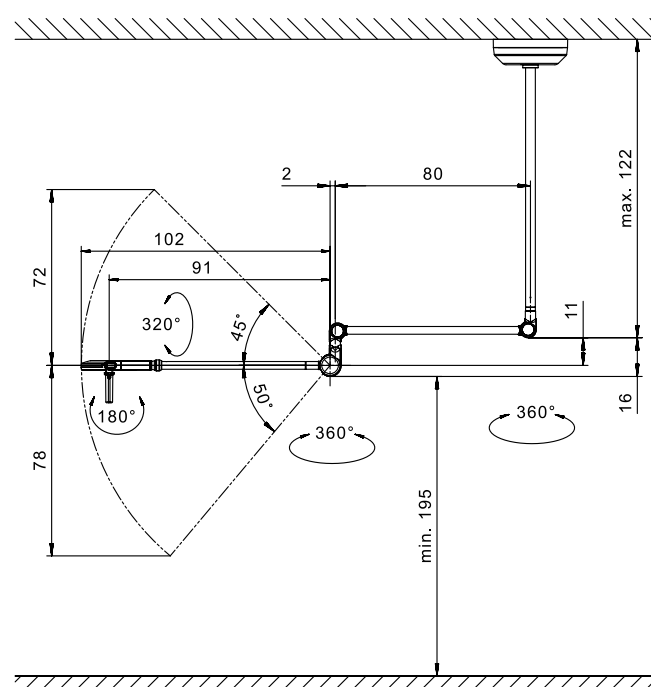

TRIANGO 60-1 W





TECHNICAL DATA

FITTED WITH	1 x LED module
LUMINOUS POWER	60 000 lux / 1,0 m *
COLOR TEMPERATURE	4 700 K *
LIGHTING FIELD 1,0 m	ø 18 cm*
COLOR RENDERING INDEX	CRI > 93
OPERATION EQUIPMENT	Electronic converter
VOLTAGE	100-240 V; 50/60 Hz
CORD LENGTH	Direct power supply
LUMINAIRE BODY	Polyamide (PA)
WEIGHT (NET)	12,5 kg
POWER CONSUMPTION	< 30 W
USAGE	Touch panel on cardanic system
TECHNOLOGY	Single-pole secondary
BALANCE OF ARTICULATION JOINTS	Spring (weight compensation)
CLASS OF PROTECTION	I
PROTECTION RATING	IP 43 (illumination head)
STANDARDS MET	EN 60601-1, EN 60601-2-41
SPECIAL FEATURES	Continuously dimmable, sterilizable handle, maintenance-free
MOUNTING	Wall mount
ACCESSORIES	Sterilizable handle, disposable cover for handle
ORDER NUMBER	D16.256.000-00813742


TREATMENT LIGHT



LIGHT DISTRIBUTION



TECHNICAL DRAWING

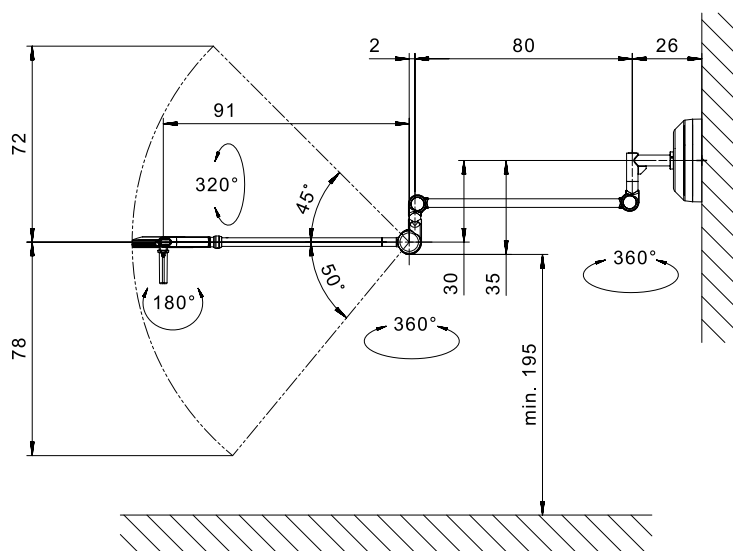

TRIANGO 60-1 F





TECHNICAL DATA

FITTED WITH	1 × LED module
LUMINOUS POWER	60 000 Lux / 1,0 m *
COLOR TEMPERATURE	4 700 K *
LIGHTING FIELD 1,0 m	ø 18 cm*
COLOR RENDERING INDEX	CRI > 93
OPERATION EQUIPMENT	Electronic converter
VOLTAGE	100-240 V; 50/60 Hz
CORD LENGTH	3 m
LUMINAIRE BODY	Polyamide (PA)
WEIGHT (NET)	19 kg
POWER CONSUMPTION	< 30 W
USAGE	Touch panel on cardanic system
TECHNOLOGY	Single-pole secondary
BALANCE OF ARTICULATION JOINTS	Spring (weight compensation)
CLASS OF PROTECTION	I
PROTECTION RATING	IP 43 (illumination head)
STANDARDS MET	EN 60601-1, EN 60601-2-41
SPECIAL FEATURES	Continuously dimmable, sterilizable handle, maintenance-free
MOUNTING	roller stand
ACCESSORIES	Sterilizable handle, intermediate ceiling adapter
ORDER NUMBER	D16.259.000-00813743 - pure white - Schuko D16.262.000-00813744 - pure white - CH D16.271.000-00813747 - pure white - UK

TREATMENT LIGHT



LIGHT DISTRIBUTION



TECHNICAL DRAWING

