


IV holders

- Welded barrel (Ø 25 mm) and height adjustable IV pole (Ø 16 mm) in stainless steel tube.
- Stainless steel or plastic hooks, curved or open - Maximum weight per hook: 4 kg.
- 5-pronged base in welded stainless steel fitted with Ø 50 mm swivel wheels.




All IV holders on this page are certified **CE**

Hook specifications

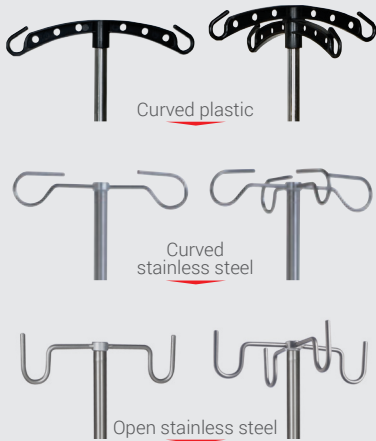


→ Standard - 2 hooks

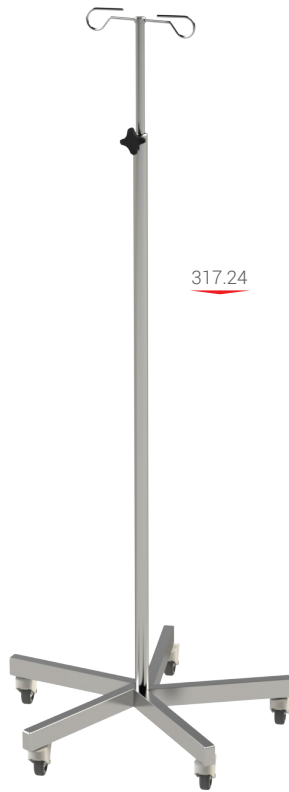

317.24

→ Plain-Manual - 4 hooks

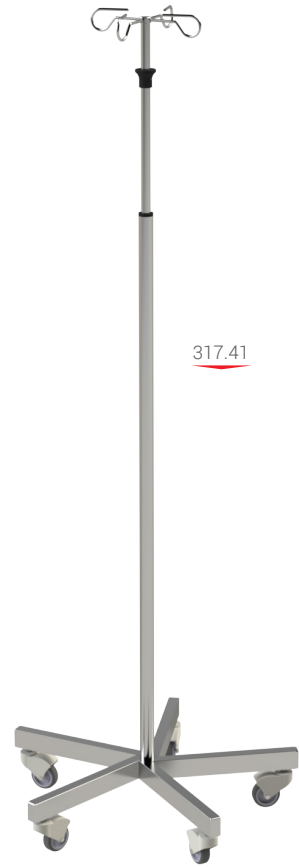

317.41

→ BASES WITH STAINLESS STEEL IV POLE

HOOK FINISH	HOOKS	DIM. Ø X H	ADJUSTMENT STANDARD	ADJUSTMENT PLAIN-MANUAL
Curved plastic	2 hooks	500 x 1800 mm	317.22	317.44
	4 hooks		317.23	317.45
Curved stainless steel	2 hooks		317.24	317.40
	4 hooks		317.25	317.41
Open stainless steel	2 hooks		317.26	317.42
	4 hooks		317.27	317.43



OPTIONS

	REF.
Weighted feet 4 kg	397.07
Supplement for 2 brake wheels	595.25



ACCESSORIES

	MODEL	REF.
Stainless steel trays with edges	Square 33 x 33 cm	397.20
	Round Ø 30 cm	397.21
Polycarbonate tray with edges	Rectangular 35 x 27 cm	397.25
Stainless steel guide handle		397.22
Stainless steel pump support		397.23
Standardised stainless steel rail		397.24



397.21

397.20